


Tok Q H400

Lombardo

No. LL12813K3

Also suitable for outdoor use. Aluminum body and top; highly resistant to oxidation thanks to cataphoresis treatment and to the UV stabilized polyester resin painting. Equipped with thermoplastic fixing bracket. Fitted for quick installation on standard Ø 60 post. Fixing bolts and small metal parts to secure the base to the ground. Diffuser made of transparent scratch-resistant UV stabilized PMMA. A4 stainless steel bolts. Provided with 1m of prewired cable H05RN-F. LED 4000K (N), 3000K (3) or 2700K (2). Integrated driver 220-240V. No risk of photobiological damage, RG0 group (EN62471). Light beam 360°.

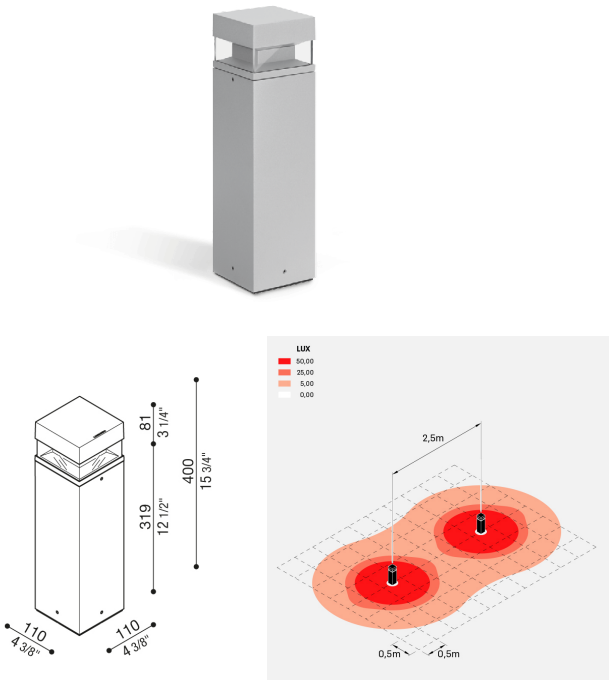

Technical

Mounting	Ground
IP Rating	IP66
IK Rating	IK10

Photometric

Colour Temp	3000K
Source	LED

Physical

Electrical

Power	LED - 1920 lm 14W
-------	-------------------

