




TOP MICRO 24V 38° 3000K NT

Top Micro 24V is miniaturized luminary that serves as a downlight for the Minimal Track system. Its reduced dimensions make Top the perfect candidate for projects where a discrete presence and a perfect integration are needed. It is a pure line and an architectural aesthetic design. Moreover, in terms of lighting performance, Top offers a conical distribution with two possible beam angles.

Downloads

- ▷ CAD
- ▷ Instructions
- ▷ Photometry

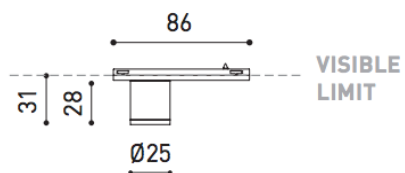

Brand

Arkoslight

Designer

Rubén Saldaña

Type

Track

Electrical Characteristics

IP 20
24Vdc
L80B10 (Tj=85°C)
>60.000h
MacAdam Step 3
No Dim
2,1 W

Material

Aluminium, Polycarbonate
9005

Photometric Data

Beam Angle: 38° W
Efficiency: 92%
CRI>90

Dimension

112x77x34 mm
Gross Weight: 55

Light Temperature

3000k

Colour/Finish

Textured black

