



Flauta Riga 2 Dimmable DALI

Flos



No. F019A22D018

Collection of outdoor wall-mounted light fittings with dual light emission, available in various lengths. The units are characterised by the surface etching in two refined variations: Flauta Riga, with vertical lines, and Flauta Spiga, characterized by an elegant and sophisticated angular pattern. Rounding out the device is a deflector accessory painted to match the finish of the lamp body. It can be installed as desired on the upper or lower head to create a decorative effect with reflected light. The structure is made of aluminium treated with a chemical conversion process for effective resistance to atmospheric agents. The powder coating of the body is available in various finishes according to the QUALICOAT standard. The first layer of epoxy powder confers chemical and mechanical resistance. The second layer, a polyester powder finish, ensures resistance to UV rays and corrosive atmospheric agents. The painted surfaces are treated with alkaline and acid washes, rinsed with demineralised water, and subjected to chemical conversion treatment to protect against rust. Diffuser is transparent glass, sealed to guarantee water resistance. Integrated LED light source. Driver integrated in the body of the unit for DALI dimmer control. LED light source included. Integrated 220-240V electrical power with DALI dimmer. Comes with deflector for optional installation on the upper or lower head. 110V version upon request.

Designed by Patricia Urquiola



Deep Brown

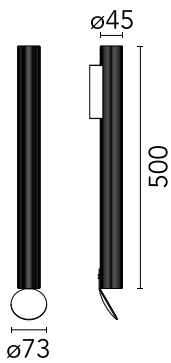

Luminous flux luminaire
694 lm

Beam Angle DIR: 32°

h(m)	E(k)	D(m)
1	1244	0.57
2	311	1.15
3	138	1.72
4	78	2.29
5	50	2.86

Technical

Mounting	Wall
Flux	347lm
IP Rating	IP65

Photometric

Colour Temp	2700K
Dimming	DALI
Beam Angle	16
CRI	80

Physical

Net Weight (kg)	1.4
-----------------	-----

Electrical

Power	12
Voltage	220-240
Driver	Integrated
Insulation class	II



